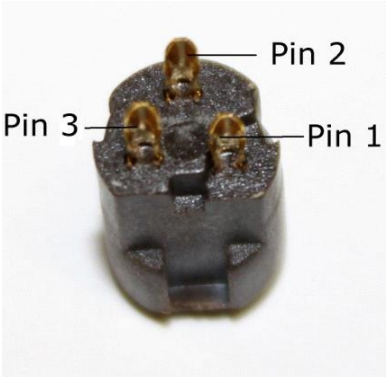
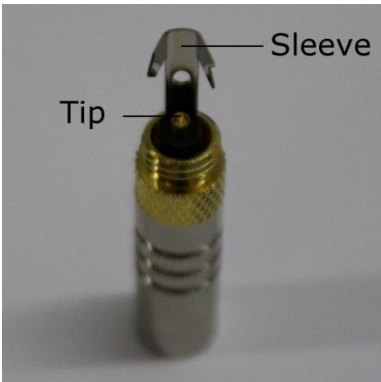
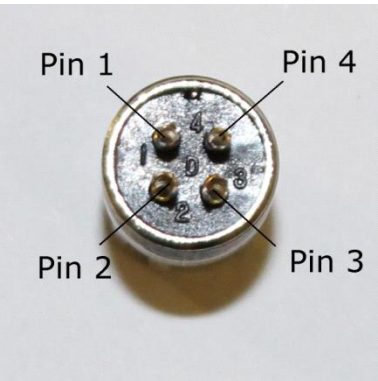


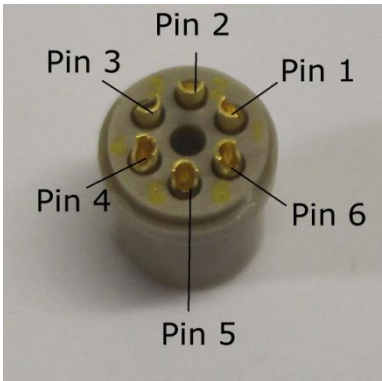
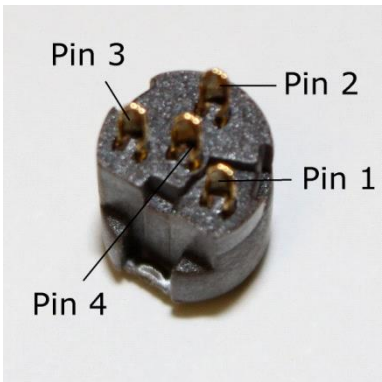
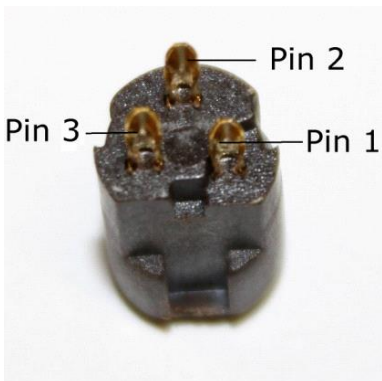
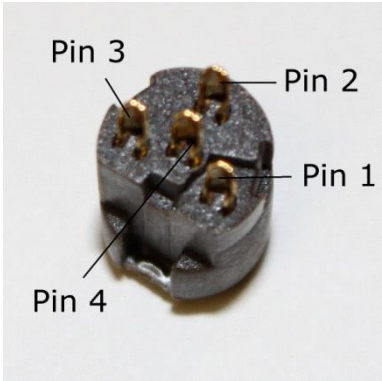


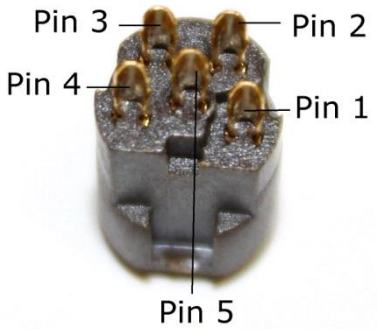
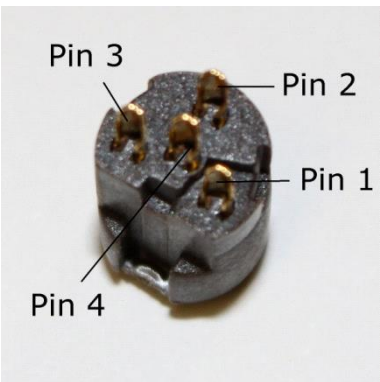
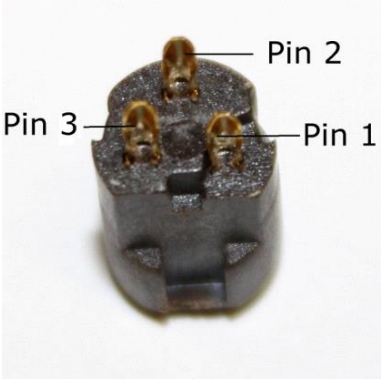
Swiss precision for excellent audio quality

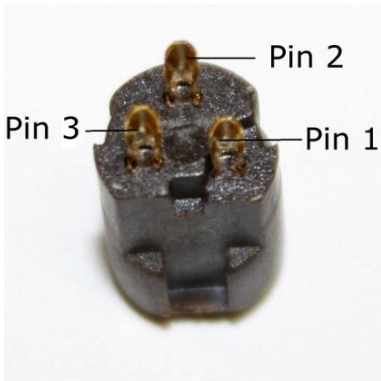
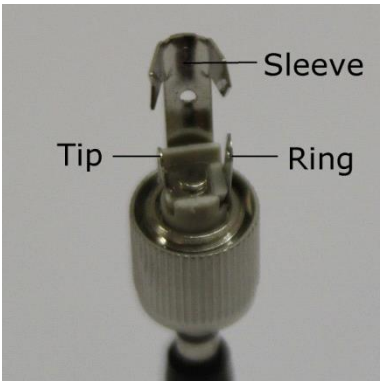
# VOICE TECHNOLOGIES

## Connection for VT100 Series

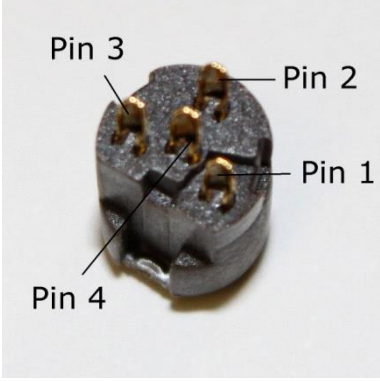
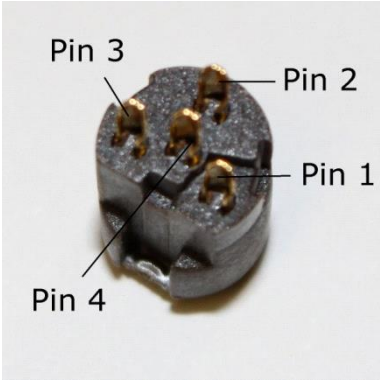

Connection with color code	Picture	Connector type	Brand, type
<p>Pin 1: Ground (green)  Pin 2: NF (copper)  Pin 3: +VDC (red)</p> <p><i>10kOhm Resistor from Pin 1 to Pin 2</i></p>		TA3F	AKG
<p>Sleeve: Ground + NF  (green + copper)  Tip: +VDC (red)</p>		3.5 mm mono	AKG B-Lock
<p>Pin 1: Ground (green)  Pin 2: -  Pin 3: NF (copper)  Pin 4: +VDC (red)</p> <p><i>10kOhm Resistor from Pin 1 to Pin 3</i></p>		Hirose 4pin	Audio Technica

Connection with color code	Picture	Connector type	Brand, type
Pin 1: NF (copper) Pin 2: +VDC (red) Pin 3: bridged to Pin 4 Pin 4: bridged to Pin 3 Pin 5: Ground (green) Pin 6: -  <i>10kOhm Resistor from Pin 1 to Pin 5</i>		Lemo 6pin	Audio Ltd.
Pin 1: Ground (green) bridget to Pin 2 Pin 2: bridget to Pin 1 Pin 3: NF (copper) Pin 4: +VDC (red)  <i>10kOhm Resistor from Pin 1 to Pin 3</i>		TA4F	Beyerdynamic
Pin 1: Ground (green) Pin 2: VDC (red) Pin 3: NF (copper)  <i>10kOhm Resistor from Pin 1 to Pin 3</i>		TA3F	Comtek
Pin 1: Ground (green) Pin 2: NF (copper) Pin 3: +VDC (red) Pin 4: bridged to Pin 3  <i>10kOhm Resistor from Pin 1 to Pin 2</i>		TA4F	Elektro Voice

Connection with color code	Picture	Connector type	Brand, type
<b>3-wire:</b> Pin 1: Ground (green) Pin 2: bridged to Pin 4 Pin 3: +VDC (red) Pin 4: bridged to Pin 2 Pin 5: NF (copper)  <i>10kOhm Resistor from Pin 1 to Pin 5</i>  <b>2-wire:</b> Pin 1: green (copper) Pin 3: rot		TA5F	Lectrosonics SM series
Pin 1: bridged to Pin 4 Pin 2: +VDC (red) Pin 3: NF (copper) Pin 4: Ground (green) Bridged to Pin1 Pin 5: -  <i>10kOhm Resistor from Pin 1 to Pin 3</i>		TA5F	Lectrosonics UM/LM Series (alt)
Pin 1: Ground (green) Pin 2: bridged to Pin 1 Pin 3: NF (copper) Pin 4: +VDC (red)  <i>10kOhm Resistor from Pin 1 to Pin 3</i>		TA4F	Mipro new series
Pin 1: Ground (green) Pin 2: NF (copper) Pin 3: +VDC (red)  <i>10kOhm Resistor from Pin 1 to Pin 2</i>		TA3F	Monacor

Connection with color code	Picture	Connector type	Brand, type
Pin 1: Ground (green) Pin 2: +VDC (red) Pin 3: NF (copper)  <i>10kOhm Resistor from Pin 1 to Pin 3</i>		TA3F	Nady
Pin 1: Ground (green) Pin 2: +VDC (red) Pin 3: NF (copper) Pin 4: -  <i>10kOhm Resistor from Pin 1 to Pin 3</i>		TA4F	Sabine SW7000
Sleeve: green&copper Tip: red		3.5 mm stereo	Sennheiser Evolution series
Pin 3: + VDC (red) Housing: Ground (green) NF (copper)	Ask for a manual	Lemo 3pin	Sennheiser professional series 2000/3000/50 00

Connection with color code	Picture	Connector type	Brand, type
Pin 1: Ground (green) Pin 2: +VDC (red) Pin 3: NF (copper) Pin 4: -  <i>10kOhm Resistor from Pin 1 to Pin 3</i>		TA4F	Shure TA4F
Pin 1: +VDC (red) Pin 2: NF (copper) Pin 3: 2,70 kOhm to Pin 4 Pin 4: Ground (green)  <i>10kOhm Resistor from Pin 1 to Pin 2</i>		Hirose 4pin SMC-9	Sony SMC-9 (Hirose 4pin)
Sleeve: Ground (green) Tip: NF (copper) Ring: +VDC (red)  <i>Sleeve to Tip</i>		3.5 mm stereo	Sony 3.5 mm stereo
Pin 1: Ground (green) Pin 2: +VDC (red) Pin 3: NF (copper) Pin 4: -  <i>10kOhm Resistor from Pin 1 to Pin 3</i>		TA4F	Toa

Connection with color code	Picture	Connector type	Brand, type
Pin 1: Ground (green) Pin 2: +VDC (red) Pin 3: NF (copper) Pin 4: -  <i>10kOhm Resistor from Pin 1 to Pin 3</i>		TA4F	Telex
Pin 1: Ground (green) Pin 2: +VDC (red) Pin 3: - Pin 4: NF (copper)  <i>10kOhm Resistor from Pin 1 to Pin 4</i>		TA4F	Trantec
Same as Sennheiser SK50	Ask for a manual	Lemo 3 pin	Wiscom Zaxcom
Sleeve: copper+green Tip : red	Ask for a manual 	2.5 mm mono	Lectrosonics WM-Serie